



PERGO
VINYL PLANKS & TILES

**PREMIUM
CLICK**

VAN DYCK
FLOORS



PRODUCT INFORMATION	
LEVEL OF USE	Light Commercial/ Heavy Residential
TOTAL THICKNESS / WEAR LAYER	4.5mm / 0.3mm
PROTECTION	Titan V™ (Provides protection against wear, scratch & impact)
CLICK	Perfect Fold™
TOTAL WEIGHT G/M ²	8.31kg/m ²
BEVELS	None
SIZE AND PACKAGING	
PLANKS	187 x 1251mm (Classic Plank)
BOX PLANKS	2.105m ² /box (9 planks)
TEST RESULTS	
WEAR RESISTANCE	≥ 2400
WEAR CLASS	32
IMPACT RESISTANCE	IC 2
FIRE RESISTANCE	Bfl - s1
SLIP RESISTANCE	DS
FURNITURE LEG RESISTANCE	No change
DIMENSIONAL STABILITY*	Variation in length and width: ≤0,05%
HEAT RESISTANCE	0.015 m ² K/W
ELECTROSTATIC PERFORMANCE	<2.0 kV
CASTOR CHAIR RESISTANCE	No Change
STAIN RESISTANCE	Class 1
LIGHT FASTNESS	Class >6
UNDERFLOOR HEATING	Suitable (in cement)
WARRANTY (YEAR)	20 Residential / Commercial - on request

Inspired by the natural feel of wood, slate and rough concrete, Pergo Premium Click Classic Plank is a 187 x 1251mm plank collection with an enhanced locking system.

BILL OF QUANTITIES SPECIFICATIONS

Pergo Premium Click flooring by Van Dyck Floors with Classic Plank sizes 187 x 1251mm and a 4.5mm overall thickness / 0.3mm wear layer, fitted in accordance with the supplier's installation instructions.

*SUN SAFE

The product can be installed in direct sunlight with surface temperature up to 65 degrees Celsius.

PRODUCT WARRANTY


The warranty covers manufacturing defects and premature wear in the event of normal use. The samples in this presentation are only cuttings for the respective products and show only a small part of the overall design and colour. With regard to colour printing of the photographic images, it is only possible to give a provisional representation of colour.

COLOUR

Decoration and shade may vary slightly from the samples shown. This product is a highly realistic replication of natural materials. Hence on many designs, natural variations in texture and colour will be present.

CAUTION

Adequate UV protection must be taken against products being installed in direct sunlight to prevent premature fading or damage.

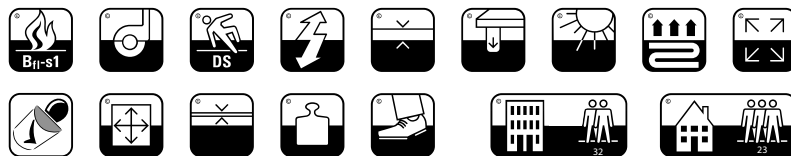

www.vandyckfloors.co.za

Follow us on Facebook, Twitter, Instagram, LinkedIn, Pinterest & YouTube



HEAD OFFICE: TEL: +27 31 913-3800 • FAX: +27 31 912-1042 | TOLL FREE: 0800 CARPET (0800227738) www.vandyckfloors.co.za